


# MPC102-845

10.4" XGA TFT Fanless Medical Grade Touch Panel Computer with Intel® Celeron® Processor N3060

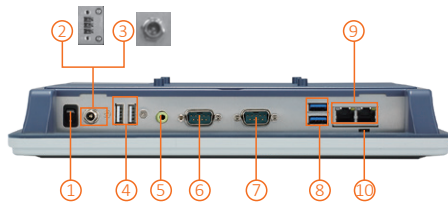

- |  |                              |
|--|------------------------------|
| 1. Power switch (ATX)                    | 6. 1 x RS-232/422/485        |
| 2. Terminal block for DC power input     | 7. 1 x RS-232                |
| 3. Screw connector with AC power adapter | 8. 2 x USB 3.0               |
| 4. 2 x USB 2.0                           | 9. 2 x LAN                   |
| 5. Audio (Line-out)                      | 10. AT/ATX selectable switch |
|  | 11. Touch on/off button      |

## Features

- 10.4" XGA TFT LCD display with LED backlight
- Fanless design with Intel® Celeron® processor N3060
- 2 GbE LANs, 4 USB and 2 COM
- Plastic and IP65-rated front bezel
- Supports RFID (optional)
- External AT/ATX mode selection switch
- Easy access storage design
- Supports panel mount, wall mount, VESA arm and desktop stand
- CE (EN 60601-1) and FCC Part 18 EN 60601-1-2 (ESD contact 8kV, air 15kV)



▲ Side view

## Introduction

The MPC102-845 is a 10.4" fanless medical touch panel computer. In response to market demand, this medical panel computer is a cost effective solution. It adopts a modern, super sleek and fanless design and is powered by the Intel® Celeron® processor N3060 dual core up to 2.48 GHz. For wireless network connection, the MPC102-845 offers 2 PCI Express Mini Card slots. By just plugging in the WLAN card, customers can have instant access to wireless LAN/GPRS/GSM/4G environments. Besides, it provides two types of power input: DC power with terminal block connector and AC power adapter with screw type connector.

### Super Slim & Ultra Lightweight Design

With a thickness of 45.8 mm and weight of 1.8 kg, the MPC102-845 is designed for use in space-constrained environments.

### Certifications

This 10.4-inch medical panel platform complies with EN60601-1 ED3.1 and CE, FCC Class B certifications to ensure medical operation safety.

### Aluminum Back Chassis with Excellent Thermal Solution

With Axiomtek's patent for plastic plus aluminum mechanism design, the MPC102-845 can dissipate the heat easily and keep the system operation stable.

## Specifications

Front Bezel	IP65, NEMA 4 rugged protection, plastic front bezel	
LCD Panel	Display Type	10.4" XGA TFT LCD with LED backlight
	Brightness (cd/m <sup>2</sup> )	350 nits (XGA)
	Resolution	1024 x 768 (XGA)
	Viewing Angel (H/V)	150°/150°
Main System	CPU	Intel® Celeron® processor N3060 2 cores (up to 2.48 GHz)
	System Memory	1 x 204-pin DDR3L-1600 SO-DIMM, up to 8GB
	BIOS	AMI UEFI BIOS
	Storage	1 x 2.5" SATA HDD (9.5 mm height) 1 x mSATA
	Watchdog Timer	255 levels, 0 to 255 sec.
I/O Connector	Onboard Graphics	Integrated in Intel® GFX
	1 x RS-232	
	1 x RS-232/422/485 (default RS-232)	
	1 x Switch for power on/off	
	1 x AT/ATX mode selection switch	
	2 x USB 2.0	
	2 x USB 3.0	
Expansion Interface	1 x Audio (Line-out)	
	2 x 10/100/1000 Mbps Ethernet (Intel® i211-AT)	
Touchscreen	1 x Full-size PCI Express Mini Card slot with mSATA	
	1 x Full-size PCI Express Mini Card slot with SIM	
Power Supply	Resistive type	
Power Consumption	AC version: 100 to 240 V AC-DC, 65W power adapter	
	DC version: 9 to 36 VDC with over current protection fuse	
Dimension	32W	
Packing Dimensions	292.5 mm (11.52") (W) x 45.8 mm (1.80") (D) x 235.8 mm (9.28") (H)	
Weight (net/gross)	415 mm (16.34") (W) x 100 mm (3.94") (D) x 315 mm (12.4") (H)	
Operating Temperature	1.8 kg (3.96 lb)/3 kg (6.61 lb)	
Relative Humidity	0°C to +40°C (+32°F to +122°F)	
Operation Vibration	20% to 90% @ +40°C; non-condensing	
Certifications	2G, 5- 500Hz, random for SSD	
	CE (EN 60601-1) and FCC Part 18 EN 60601-1-2 (ESD contact 8kV, air 15kV)	

## Ordering Information

### Standard

MPC102-845-DC (P/N: E228102104)	10.4" XGA fanless medical touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen and DC power input (terminal block connector)
MPC102-845-J (P/N: E228102103)	10.4" XGA fanless medical touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen, AC-DC 65W power adapter (screw type connector) and EMI class B

\* Other configuration by request

\* Specification and certifications may vary based on different requirements

## Packing List

1 x MPC102-845
1 x Adapter (MPC102-845-J)
1 x Power cord (MPC102-845-J)
1 x Phoenix connector (MPC102-845 DC)

## Optional Accessories

Wi-Fi + Bluetooth kit

881281021A0E Panel mount kit

881251001A0E Wall mount kit

E226171119 Stand kit

881251203A0E RFID kit

## Optional EOS Installation

WES 7

WE8S (64-bit)

## Optional OS Installation

Windows® 7

Windows® 8.1 (64-bit)

Windows® 10



▲ AC power adapter  
(for MPC102-845-J)

## Dimensions

