



KX60

60mm Receipt/Ticket Kiosk Printer

KX60 is the ultralightweight and super compact design receipt and ticket printer. Its robust cutter, easy-to-inspect design, and integrated **roll holder**, make it a reliable and flexible device.















CHARACTERISTICS

1. Ultra-compact

Design

2. Two models

Horizontal (H) and Vertical (V)

3. Robust cutter

Full and partial cutting

4. Easy

To inspect and use design

5. Integrated

Roll holder and paper mouth

APPLICATIONS

- Vending machines
- Kiosk self-service
- Gas station
- Gaming machines
- Parking meters
- Queue management systems



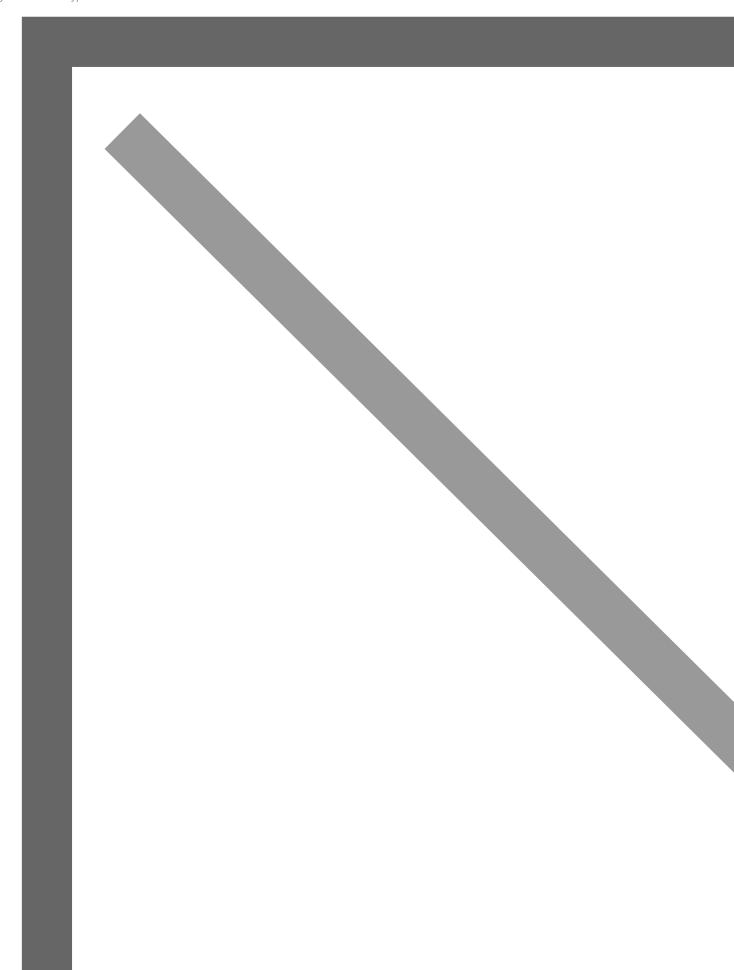








Image not found or type unknown













TECHNICAL SHEET

Resolution 203 dpi Printing speed max 200 mm/s Paper width 60 mm Paper thickness from 50\(\text{SM} \text{ to 120\(\text{SM} \text{ to 100 mm} } \text{ to 100 mm}	
Paper width 60 mm Paper thickness from 50 m to 120 m Roll diameter up to 100 mm Printing direction Standard, reversed USB 2.0 full speed Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Paper thickness from 50\mathbb{Mm} to 120\mathbb{Mm} Roll diameter up to 100 mm Printing direction Standard, reversed USB 2.0 full speed Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Roll diameter up to 100 mm Printing direction Standard, reversed USB 2.0 full speed Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Printing direction Standard, reversed USB 2.0 full speed Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Interfaces USB 2.0 full speed Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Serial RS232 Supported Barcodes UPC-E, EAN8, EAN13, CODE39, CODE128, ITF, CODABAR, PDF41 Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
Character Set European, English, American, Japanese, Korean MTBF Cutter 1M cuts, full or partial cutting	
MTBF Cutter 1M cuts, full or partial cutting	.7, QR CODE
MTBF Head 100 Km / 100M pulses	
Sensors Paper presence, near paper end, blackmark, door opening	
Windows® (32/64 bit); CUPS Linux (32/64 bit) Debian, Redhat; Android™; Printer Driver Installer	
Utility Memory switch setting Utility, Logo setup tool, Firmware update	
Dimensions (with 100 mm paper roll) KX60H: 98.1 mm (L) x 151.3 mm (W) x 119.2 mm (H) KX60V: 98.1 mm (L) x 119.2 mm (W) x 177.1 mm (H)	
Weight 380 g	

MODELS







915PF010200300 RS232 WITH ROLL HOLDER

Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: 8RQN7AZ

The technical data on this website are not binding and may be changed without advanced notice. Last update: 15 February 2024







